


1 Humbucker, 1 Volume, 1 Tone

Stewart Macdonald Custom 2 wire Diagram for Guitarbuilding.org Single Humbucker Kits

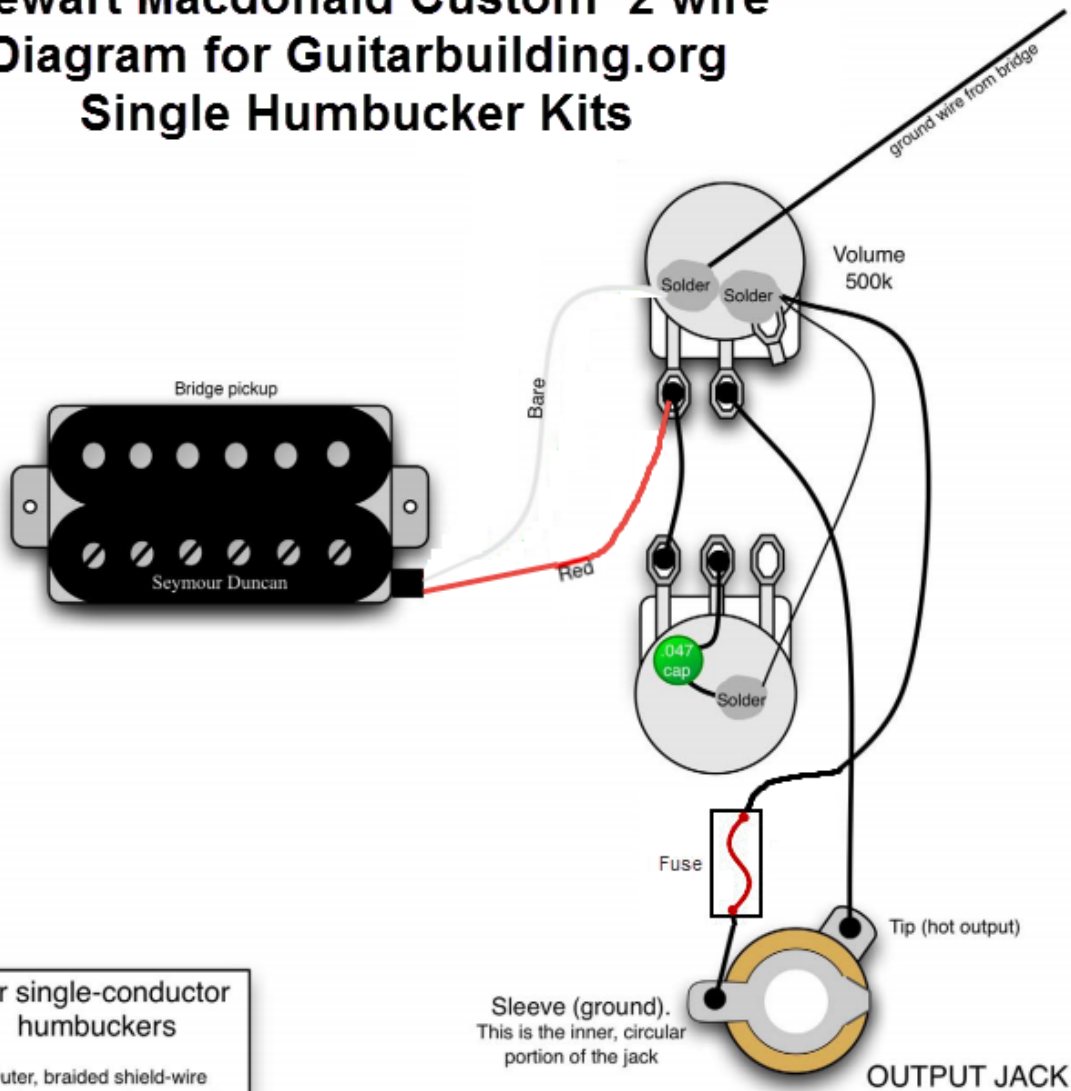

For single-conductor humbuckers

Outer, braided shield-wire must be connected to ground. (it may be soldered directly to the back of volume pot).

Inner, black cloth wire is the hot output

Solder = location for ground (earth) connections.



Original Diagram supplied by:

